



MDU Solutions®

UCrypt® Q2IPv2

Patent Pending




## UCrypt® QAM to IP v2: \*

### Features:

- ▶ The UCrypt® QAM to IP product offering allows MSOs to decrypt select programs from their digital tier, re-encrypt them with Pro:Idiom®, Verimatrix® or leave them in-the-clear & retransmit them over GigE-based IP protocol
- ▶ Perfect for providing content to commercial or hospitality environments with deployed IPTV systems or for use within other system architectures requiring Pro:Idiom or Verimatrix encrypted content or in-the-clear content in IP format
- ▶ Supports MPEG-2 & H.264 streams
- ▶ Configurable multicast IP & port assignments for output streams
- ▶ Features intelligent “plant following” functionality to ensure output programs are maintained during cable plant program moves
- ▶ Includes an easy-to-use management interface which allows users to select programs to be decrypted and/or passed through to the output of the device & assign them to desired IP multicast addresses
- ▶ Features a true field-upgradeable design to easily add channel capacity on an as-required basis as well as easily replaceable redundant power supply modules
- ▶ HTTPS-based management interface allows operators to monitor, manage & configure the product remotely




UC2 Q2IP (front view)

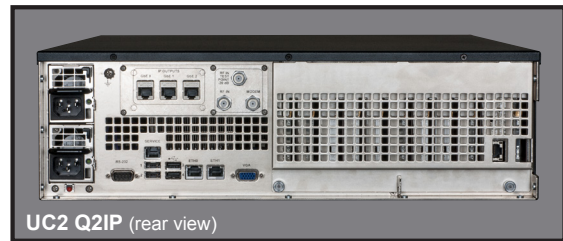

UC2 Q2IP (rear view)

### Functional Schematic

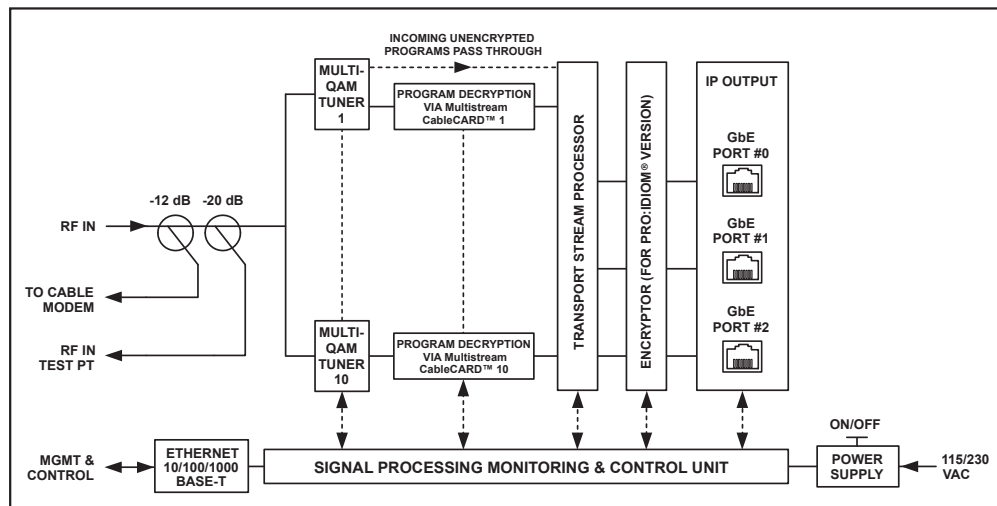

UCrypt<sup>®</sup> QAM to IP v2: \*

UCrypt<sup>®</sup> QAM to IP v2 Specifications

SPECIFICATIONS	
<b>INPUT</b>	
RF QAM	Up to 60 64 QAM & 256 QAM Tuners <sup>(1)</sup>
RF QPSK	Complies with ANSI/SCTE 55-1&2 2.048 Mbps & 1.544/3.088 Mbps, ANSI/SCTE 40
CONNECTOR	F Connector; Chassis Rear
FREQUENCY RANGE	54 MHz - 1 GHz in 1 kHz Steps, Supporting STD, IRC, HRC
ADJACENT QAM CHANNEL REQUIREMENT	None; All Tuners Individually Agile
RF INPUT	+5 to +10 dBmV per Digital Carrier
RF INPUT TEST	-20 dB Relative to Input; F Connector, Chassis Rear
<b>TS PROCESSING</b>	
PASSED CONTENT	Decrypt up to 60 Programs <sup>(1)</sup> Using up to 10 Multistream CableCARD™ Devices Remaining Unencrypted Content can be Transferred to the Device Output
CABLECARD DECRYPTION	Supports Motorola, Scientific Atlanta/Cisco, & NDS
MULTIPLEXING CAPACITY	Flexible Creation of SPTS and/or MPTS Multiplexes with PAT/PMT Generation per TS
ENCRYPTION <sup>(1)</sup>	Pro:Idiom, Verimatrix (Simulcrypt-based) or Unencrypted Output Options
ENCRYPTION CAPACITY <sup>(3)(4)</sup>	Up to 60 programs. Pro:Idiom (MPTS or SPTS), Verimatrix (SPTS only)
SUPPORTED VIDEO FORMATS	MPEG-2 MP@HL, MPEG-4 pt10 AVC/H.264 HP@L4
SUPPORTED VIDEO RESOLUTIONS	Up to 720p & 1080i
SUPPORTED AUDIO FORMATS	Dolby® Digital (AC-3), MPEG-1 L1/2
CLOSED CAPTION (CC)	Pass through original EIA 608/708 Closed Captioning
VERIMATRIX MODES	AES-ECB1, AES-ECB2 & AES-CBC1
<b>OUTPUT</b>	
ETHERNET	IEEE 802.3-2002, 1000BASE-T (GbE)
CONNECTORS	3x RJ45; Chassis Rear
PHYSICAL PORT ADDRESS	Static IP Address or DHCP Client Mode per Port
TRANSPORT LAYER PROTOCOL	UDP
TRANSPORT STREAM SUPPORT	MPTS & SPTS
ADDRESSING	IPv4 Multicast & Unicast, Supporting all Valid IP Port Numbers
ENCAPSULATION	188 Bytes per TS Packet / 7 TS Packets per IP Packet
<b>DEVICE MANAGEMENT</b>	
MANAGEMENT INTERFACE	Local or Remote Management via Integrated Secure Web Server
MANAGEMENT INTERFACE PORT	10/100/1000BASE-T, Static IP or DHCP, RJ45, Chassis Rear
SECONDARY CRAFT PORT	10/100/1000BASE-T, Static IP, RJ45, Chassis Rear
MANAGEMENT SECURITY	3 Password Protected Tiered User Accounts
MASS DEPLOYMENT & BACKUP	Importable/Exportable Device Configuration Files
REMOTE MONITORING	Integrated SNMP Agent & MIB
REMOTE MANAGEMENT SUPPORT	F Connector Provided for Optional MSO Supplied Cable Modem Installation for Remote Management
ALARMS	Email Notification, SNMP Traps
<b>EAS</b>	
MODES	Support for ANSI/SCTE 18 Compliant & Non-compliant Devices
<b>PHYSICAL &amp; ENVIRONMENTAL</b>	
FORM FACTOR	3RU, 19" Rack Mount
DIMENSIONS	5.25"H x 19.0"W x 23.96"D (13.34H x 48.26W x 60.86D cm)
WEIGHT (Max)	45.9 lbs (20.8 kg)
INPUT POWER	4.0 Amps @ 115 VAC, 2.0 Amps @ 230 VAC
POWER REDUNDANCY	Fully Redundant 520W Power Supply Modules, Hot-swappable
ELECTRICAL APPROVAL	Approved to UL 60950-1, 2nd Edition (File E325862)
POWER CONTROL	Software Power Control
OPERATING TEMPERATURE	0°C to +40°C <sup>(2)</sup> (+32°F to +104°F)
HUMIDITY	0-95% Non-condensing
<b>NOTES:</b>	
(1) Depends upon ordered hardware options.	
(2) For details on exceeding +30°C, please refer to the UCrypt Environment & Temperature Considerations Info Sheet (#ANW1066).	
(3) Specific hardware is required.	
(4) User is able to select output encryption type, see ordering information.	
Dolby is a registered trademark of Dolby Laboratories. Manufactured under license from Dolby Laboratories.	

## UCrypt® QAM to IP v2: \*

### Ordering Information

Part Number	Description
<b>UC 2.0 Q2IP with Unencrypted Output</b>	
UCT6QIP	UC2 Q2IP 6 Tuner/Decrypt IP Out
UCT12QIP	UC2 Q2IP 12 Tuner/Decrypt IP Out
UCT18QIP	UC2 Q2IP 18 Tuner/Decrypt IP Out
UCT24QIP	UC2 Q2IP 24 Tuner/Decrypt IP Out
UCT30QIP	UC2 Q2IP 30 Tuner/Decrypt IP Out
UCT36QIP	UC2 Q2IP 36 Tuner/Decrypt IP Out
UCT42QIP	UC2 Q2IP 42 Tuner/Decrypt IP Out
UCT48QIP	UC2 Q2IP 48 Tuner/Decrypt IP Out
UCT54QIP	UC2 Q2IP 54 Tuner/Decrypt IP Out
UCT60QIP	UC2 Q2IP 60 Tuner/Decrypt IP Out
<b>UC 2.0 Q2IP with PRO:IDIOM Output</b>	
UCT12PQIP	UC2 Q2IP 12 Tuner/Decrypt Pro:Idiom Encrypted IP Out
UCT24PQIP	UC2 Q2IP 24 Tuner/Decrypt Pro:Idiom Encrypted IP Out
UCT48PQIP	UC2 Q2IP 48 Tuner/Decrypt Pro:Idiom Encrypted IP Out
UCT60PQIP	UC2 Q2IP 60 Tuner/Decrypt Pro:Idiom Encrypted IP Out
<b>UC 2.0 Q2IP with Verimatrix (Simulcrypt-based) Output</b>	
UCT12SQIP	UC2 Q2IP 12 Tuner/Decrypt Verimatrix (Simulcrypt-based) Encrypted IP Out (SPTS only)
UCT24SQIP	UC2 Q2IP 24 Tuner/Decrypt Verimatrix (Simulcrypt-based) Encrypted IP Out (SPTS only)
UCT48SQIP	UC2 Q2IP 48 Tuner/Decrypt Verimatrix (Simulcrypt-based) Encrypted IP Out (SPTS only)
UCT60SQIP	UC2 Q2IP 60 Tuner/Decrypt Verimatrix (Simulcrypt-based) Encrypted IP Out (SPTS only)
<b>UC 2.0 Q2IP with PRO:IDIOM or Verimatrix (Simulcrypt-based) Output</b>	
UCT12XQIP	UC2 Q2IP 12 Tuner/Decrypt Pro:Idiom or Verimatrix (Simulcrypt-based) Encrypted (SPTS only) IP Out
UCT24XQIP	UC2 Q2IP 24 Tuner/Decrypt Pro:Idiom or Verimatrix (Simulcrypt-based) Encrypted (SPTS only) IP Out
UCT48XQIP	UC2 Q2IP 48 Tuner/Decrypt Pro:Idiom or Verimatrix (Simulcrypt-based) Encrypted (SPTS only) IP Out
UCT60XQIP	UC2 Q2IP 60 Tuner/Decrypt Pro:Idiom or Verimatrix (Simulcrypt-based) Encrypted (SPTS only) IP Out
<b>Verimatrix (Simulcrypt-based) Encryption Add-on</b>	
UC-SCR-ADD	Post-sale Verimatrix (Simulcrypt-based) Encryption Functionality License (NOTE: This applies only to UCrypt hardware versions of v3.1 or later)

\* Any use of the UCrypt product, directly or indirectly, for the decryption and unauthorized reproduction of content that constitutes or may constitute copyright infringement or otherwise infringes on the proprietary rights of any third party is expressly prohibited. No user of UCrypt shall use UCrypt for any purpose or in any manner which, directly or indirectly, violates the law, violates the proprietary rights of any other party, or aids in any unlawful act or undertaking including, without limitation, laws governing data privacy, international data transmission, and export of technology or data. Any multiple systems operator or other similar party ("MSO") will use the UCrypt product in strict compliance with all applicable laws and in compliance with any agreement in effect between the MSO and a content provider. In no event shall ATX Networks Corp. or any of its affiliates be liable to an MSO, any end user of the UCrypt product, or any other third party, for any claims arising out of or related to any use or misuse of the UCrypt product in contravention of this disclaimer. It is the express obligation of an MSO to convey this disclaimer to any other end user of the UCrypt product.

MDU Solutions® and UCrypt® are registered trademarks of ATX in the United States and/or other countries. Products or features contained herein may be covered by one or more U.S. or foreign patents. Pro:Idiom®, Verimatrix®, Dolby®, CableCARD™ and other non-ATX product and company names mentioned in this data sheet are the property of their respective companies.



Specifications subject to change without notice.

