

# ReKEY nano




Patent Pending

ReKEY nano  
(front view)

## Pro:Idiom® Key Refresh Device (ReKEY nano) Device for Re-keying Pro:Idiom TVs

### Features

- Easily update any QAM TV (or STB) with a corrupted/lost Pro:Idiom® key
- Update Pro:Idiom key and receive visual confirmation via TV within 60 seconds
- Repair TVs with a single button press (once the ReKEY device is configured for the first TV at a property)
- Connects directly to the affected TV, so there is no risk of corrupting further TVs
- Compact and light design for easy portability
- Simple operation with pushbuttons and LCD

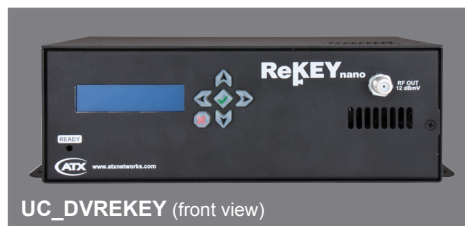

UC\_DVREKEY (front view)




UC\_DVREKEY (rear view)

### Specifications

#### ReKEY nano

#### UC\_DVREKEY

CHASSIS OVERVIEW	
DIMENSIONS	3.3"H x 8.8"W x 5.5"D (8.38H x 22.35W x 13.97D cm)
WEIGHT	2.2 lbs (1.0 kg)
POWER SUPPLY	110-240 VAC, 50/60 Hz
POWER CONSUMPTION	25W (max)
OPERATING TEMPERATURE	0°C to -50°C (+32°F to 122°F)
HUMIDITY	0-95% (without condensation)
OUTPUT	
QAM MODULATION	ITU-T J.83 Annex B
MODULATION FORMAT	256 QAM
RF QAM OUTPUT POWER AT RF OUT	12 dBmV
RF QAM FREQUENCY OUTPUT RANGE	57-867 MHz
SUPPORTED CHANNEL PLANS	Standard, HRC, IRC
FREQUENCY STEP	25 kHz
RF QAM CHANNEL BANDWIDTH	6 MHz
MPEG PROGRAM NUMBER	1-65535
RF INTERFACES	
RF OUT	F, 75 Ω, 12 dBmV
DEVICE MANAGEMENT	
MANAGEMENT INTERFACE	LCD and Pushbuttons

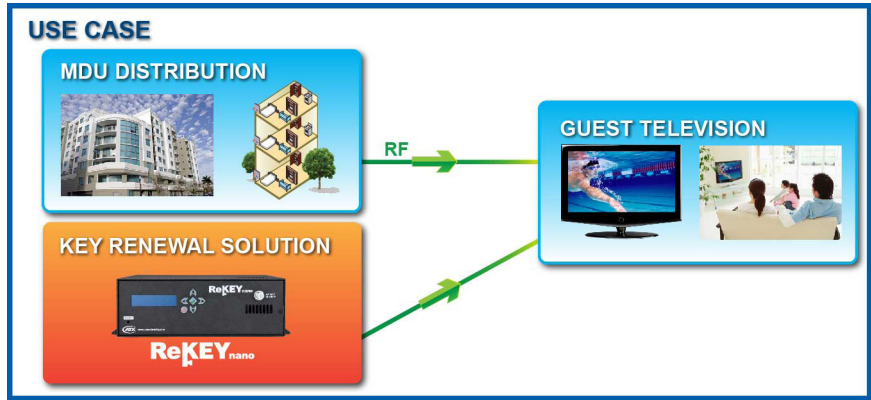

Application Diagram

## Ordering Information

Part Number	Description
UC_DVREKEY	Key Renewal Solution

MDU Solutions® is a registered trademark of ATX in the United States and/or other countries. Products or features contained herein may be covered by one or more U.S. or foreign patents. Pro:Idiom® and other non-ATX product and company names mentioned in this data sheet are the property of their respective companies.

© 2018 ATX Networks  
 Printed in Canada  
 Information in this document is subject to change without notice.  
 Rev. 08/18 (ANW1015)



**ATX Networks**  
 1-501 Clements Road West, Ajax, ON L1S 7H4 Canada  
 Tel: 905.428.6068 | Toll Free: 800.565.7488 | support@atxnetworks.com